



BACKSHEET MONOCRYSTALLINE MODULE

PRODUCT: TSM-XXXDE20

PRODUCT RANGE: 585-610W

610W


MAXIMUM POWER OUTPUT

0~+5W

BINNING TOLERANCE

21.6%

MAXIMUM EFFICIENCY

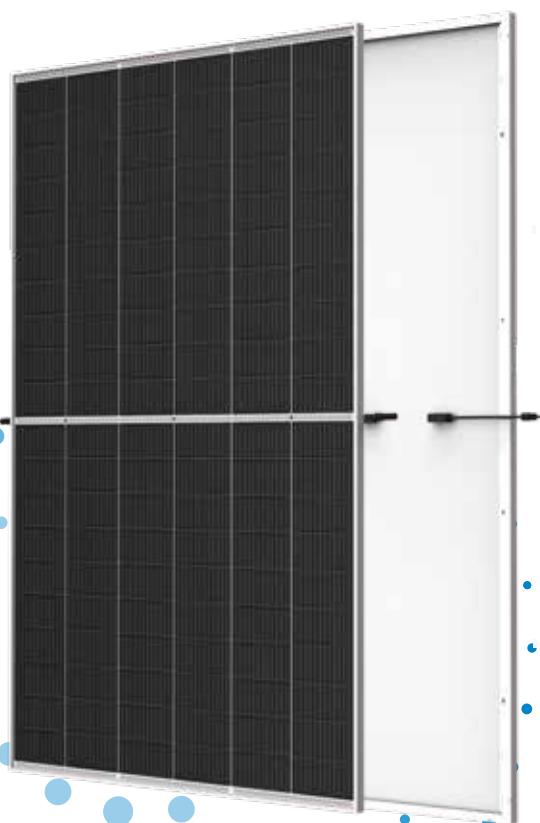

High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components



High power Mono Perc up to 610W

- Up to 21.6% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability


- Minimized micro-cracks with innovative non-destructive cutting technology
- Fire class rating C
- Resistant to harsh environments such as salt, ammonia, sand
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature

Trina Solar's Backsheet Performance Warranty

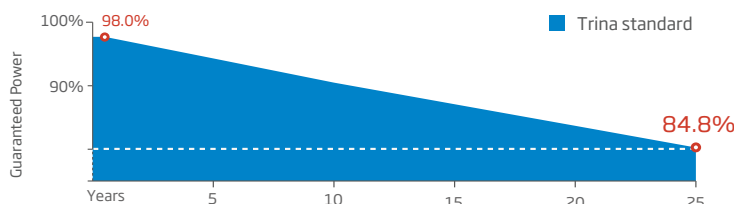


Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716/UL61730
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System




DIMENSIONS OF PV MODULE(mm)

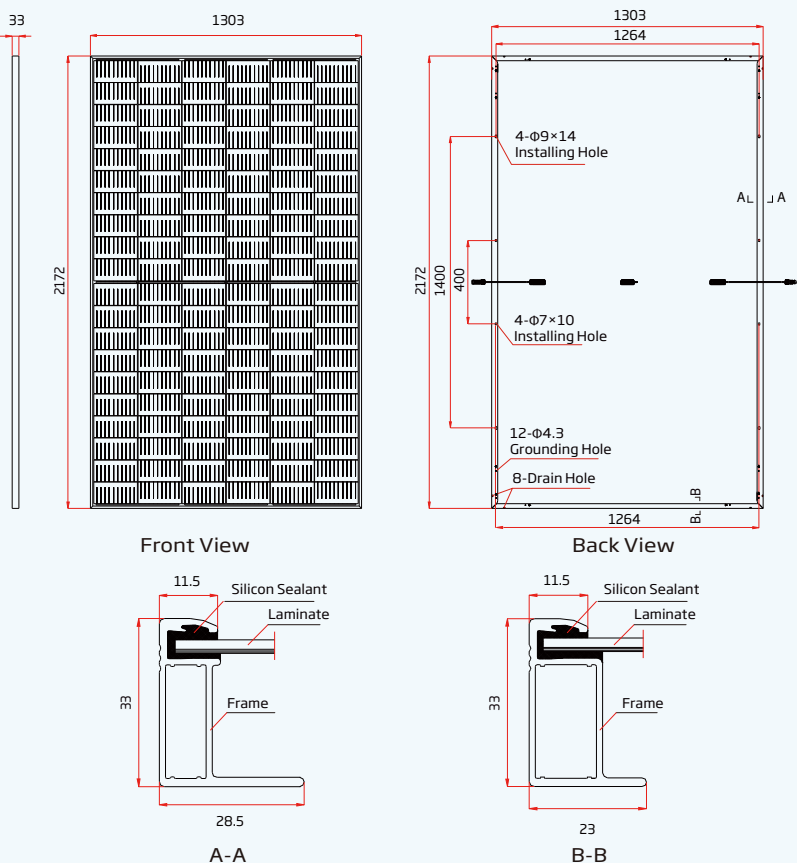

I-V CURVES OF PV MODULE(600W)

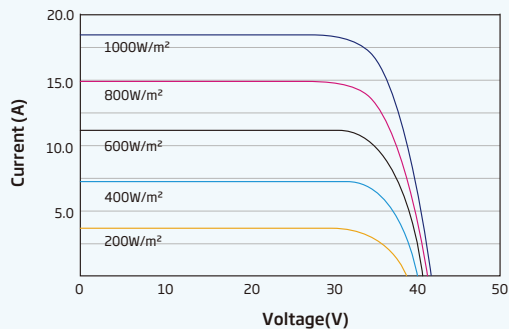

P-V CURVES OF PV MODULE(600W)

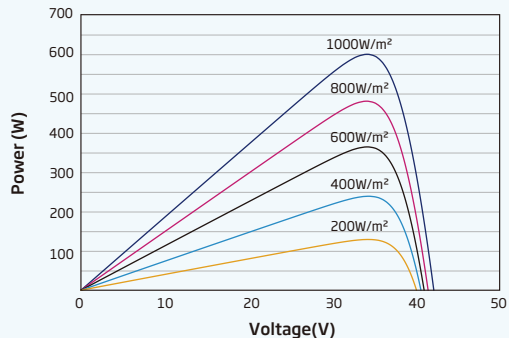

ELECTRICAL DATA (STC)

Peak Power Watts-P _{MAX} (Wp)*	585	590	595	600	605	610
Binning Tolerance-P _{MAX} (W)	0 ~ +5					
Maximum Power Voltage-V _{MPP} (V)	33.8	34.0	34.2	34.4	34.6	34.8
Maximum Power Current-I _{MPP} (A)	17.31	17.35	17.40	17.44	17.49	17.53
Open Circuit Voltage-V _{OC} (V)	40.9	41.1	41.3	41.5	41.7	41.9
Short Circuit Current-I _{SC} (A)	18.37	18.42	18.47	18.52	18.57	18.62
Module Efficiency η_m (%)	20.7	20.8	21.0	21.2	21.4	21.6

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: $\pm 3\%$.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	443	447	451	454	458	461
Maximum Power Voltage-V _{MPP} (V)	31.5	31.7	31.9	32.0	32.2	32.4
Maximum Power Current-I _{MPP} (A)	14.05	14.09	14.13	14.18	14.22	14.25
Open Circuit Voltage-V _{OC} (V)	38.5	38.7	38.9	39.1	39.3	39.5
Short Circuit Current-I _{SC} (A)	14.81	14.85	14.88	14.92	14.96	15.00

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	2172×1303×33 mm (85.51×51.30×1.30 inches)
Weight	30.6 kg (67.5 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	White
Frame	33mm(1.30 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	Staubli MC4 EVO2 / Trina Solar TS4

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C ($\pm 2^\circ\text{C}$)
Temperature Coefficient of P _{MAX}	-0.34%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	30A

WARRANTY

12 year Product Workmanship Warranty
25 year Power Warranty
2% first year degradation
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 33 pieces
Modules per 40' container: 594 pieces