

60HL4-V 460-490 Watt

	- e o o - r l l e
	20 60 2
	1906 11 0
	22.5
Connector Type	JK03M; JK03M2; MC4; MC4-EVO2; Jinko material
	4.0 mm
	(+): 400 mm , (-): 200 mm or Customized Length

P Co ur o

Pallet Dimensions	1936×1120×1249 mm
P e l wo l l e e	36 pcs/pallets, 72 pcs/stack, 864 pcs/ 40'HQ Container

e i i tions (C)

u Power - P	460	465	470	475	480	485	490
u Power ol e -	35.36	35.52	35.69	35.88	36.06	36.25	36.43
u Power Curre -	13.01	13.09	13.17	13.24	13.31	13.38	13.45
e - r u ol e - o	43.00	43.15	43.30	43.45	43.60	43.76	43.91
or - r u Curre -	13.53	13.61	13.69	13.77	13.85	13.93	14.01
o u l e e C	21.28	21.51	21.75	21.98	22.21	22.44	22.67
Power e ure e o l e r e	± 3%						
o e r o r t i n Tolerance	0 ~ +3%						
e e r u r e C o e e o P	-0.2 C						
e e r u r e C o e e o o	-0.2 C						
e e r u r e C o e e o	0.04 C						

C: r r d i n e 000 m², Cell e e r u r e C

e o C


u Power - P	346	350	353	357	361	365	369
u Power ol e -	32.95	33.11	33.21	33.40	33.61	33.84	34.00
u Power Curre -	10.50	10.57	10.63	10.69	10.74	10.80	10.86
e - r u ol e - o	40.85	40.99	41.14	41.28	41.42	41.57	41.71
or - r u Curre -	10.82	10.99	11.05	11.12	11.18	11.24	11.31

C r r e e e e r u r e C e e

l o Co o

er ting em er ture	-40 C + C
imum stem o t ge	00 C (C)
imum eries use ting	2
omin er ting Ce em er ture - C	4 2 C


eer r w

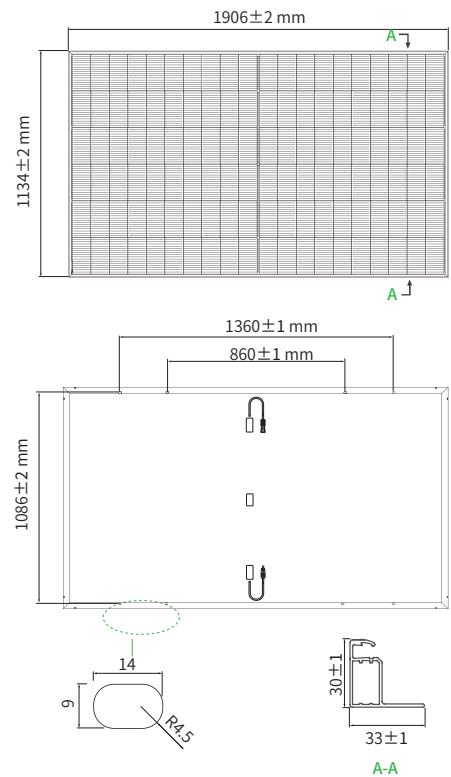


oe or e e o o l e r e r e l e e
reer o e orre o e l e oule r w

le r l Per or e

Power-Voltage Curves (60HL4- (V) 480W)

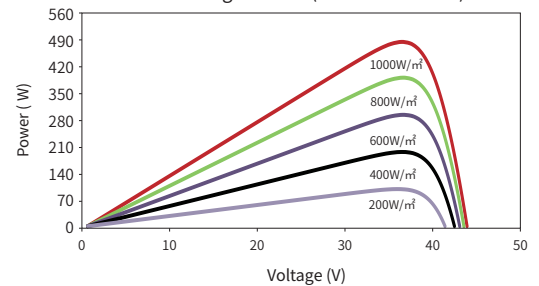

Current-Voltage Curves (60HL4-(V) 480W)

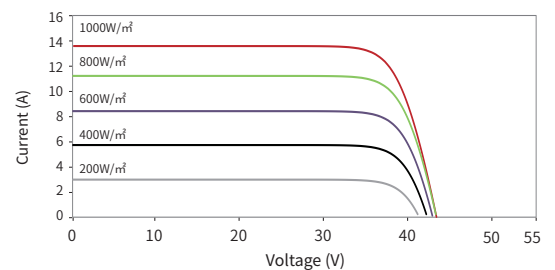

Made in China



o e e C o r C
el - - - - www o ol r o

JKM70490N-60HL4-VF6C1-EN

NOTE: Please read the safety and installation manual before using the product.

We reserve the right of final interpretation. The specifications in this datasheet are subject to change without notice.